

TILLAGE EQUIPMENT



WOODS TILLAGE EQUIPMENT

When you're ready to dig in and work the soil, turn to Woods. We bring a well-earned reputation for durability, reliability and innovation to our line of tillage equipment. Woods rotary tillers and disc harrows are designed for medium- and heavy-duty projects on homes, small farms, orchards or nurseries and for anyone living the country life. Choose from a range of widths depending upon your tasks.

THERE'S NOTHING LIKE THE SMELL OF FRESH TURNED DIRT.



Woods' line of rotary tillers couples the best design features with outstanding performance. In fact, our 30- and 40-series rotary tillers received the 2017 ASABE award for Outstanding Innovations in Product or Systems Technology.

When you're ready to dig in and work the soil, turn to Woods.

CHOOSE FROM FORWARD AND REVERSE ROTATION

In 44- to 74-inch widths, Woods' forward rotation rotary tillers are ideal for moist, wet, rocky, sandy or loose soil conditions. Reverse rotation tillers deliver a smoother top layer of soil by allowing ground cover to travel over the rotor top first, then incorporating it back into the ground beneath a fresh new layer of dirt.



REVERSE

FORWARD

ROTARY TILLERS | Forward & Reverse Rotation



Woods' line of rotary tillers couples the best design features with outstanding performance for the discerning user. Our tillers will handle your landscaping and gardening projects with ease.

RT48.30

TRACTOR PTO HP RANGE: 17 - 35 HP 30-SERIES ROTARY TILLERS

RT42.30/RTR42.30 | 41-inch

RT48.30/RTR48.30 | 47-inch

TRACTOR PTO HP RANGE: 25 - 50 HP 40-SERIES ROTARY TILLERS

RT60.40/RTR60.40 | 59-inch

RT72.40/RTR72.40 | 71-inch

- Innovative double-flange blade support
- Gear-driven side drive – less maintenance than chain-driven units
- 3-year warranty on input gearbox (includes seals)

MODEL	RT42.30/RTR42.30	RT48.30/RTR48.30	RT60.40/RTR60.40	RT72.40/RTR72.40
Tractor PTO HP Range	12–30 hp	15–35 hp	18–40 hp	20–50 hp
Tractor Hitch	Limited CAT 1 & 1		CAT 1	
Tilling Width	41"	47"	59"	71"
Overall Width	51"	57"	69"	81"
Weight	478 lbs / 484 lbs	502 lbs / 508 lbs	570 lbs / 578 lbs	621 lbs / 630 lbs
Maximum Tilling Depth	7"	7"	7"	7"
Drive Type	gearbox			
Standard Number of Tines/Number of Flanges	20/5	24/6	28/7	36 / 9
Number of Tines per Flange	4 C-type			
Rotor Shaft	210 rpm			
PTO Driveline Protection	slip clutch			
Tractor PTO Speed	540 rpm			
Gearbox Housing	heavy-duty cast iron			
Gearbox Drain Plug	yes			
Convertible Side Shift Right	3"		2.5"	
Quick-Hitch Compatible	yes			

ROTARY TILLERS | Forward & Reverse Rotation

TRACTOR PTO HP RANGE: 20 - 45 HP

TC60/TCR60 | 60-inch **TC74/TCR74** | 72-inch

TC68/TCR68 | 84-inch

- Specifically designed for compact tractors
- Sturdy rear tailgate evenly distributes dirt — leaves a smooth, flat seedbed



MODEL	TC60/TCR60	TC68/TCR68	TC74/TCR74
Tractor PTO HP Range	20–45 hp		
Tractor Hitch	CAT 1		
Tilling Width	60"	68"	74"
Overall Width	67"	75"	81"
Weight	597 lbs / 604 lbs	634 lbs / 641 lbs	665 lbs / 672 lbs
Maximum Tilling Depth	7.5"	7.5"	7.5"
Drive Type	#80 chain		
Standard Number of Tines/Number of Flanges	42/7	48/8	54/9
Number of Tines per Flange	6 C-type		
Rotor Shaft	240 rpm		
PTO Driveline Protection	slip clutch		
Tractor PTO Speed	540 rpm		
Gearbox Housing	heavy-duty cast iron		
Gearbox Drain Plug	yes		
Convertible Side Shift Right	15.5"	19.5"	22.5"
Quick-Hitch Compatible	yes		

Disc Harrows

Whether you're breaking new ground for a garden, or tilling an existing nursery, food plot, vineyard or farm, Woods has the right disc harrow for your land. These rugged disc harrows carry Woods' reputation for durability and reliability. Plus, these new discs are easy to use due to innovative design features like individually adjustable disc gangs that reposition with a single pin.


TRACTOR PTO HP RANGE: UP TO 55 HP

DHS48 | 48-inch

DHS64 | 64-inch

DHS80 | 80-inch

- Optional mud scrapers that prevent clogging, increase productivity
- Optional furrow fillers (DHS64, DHS80)

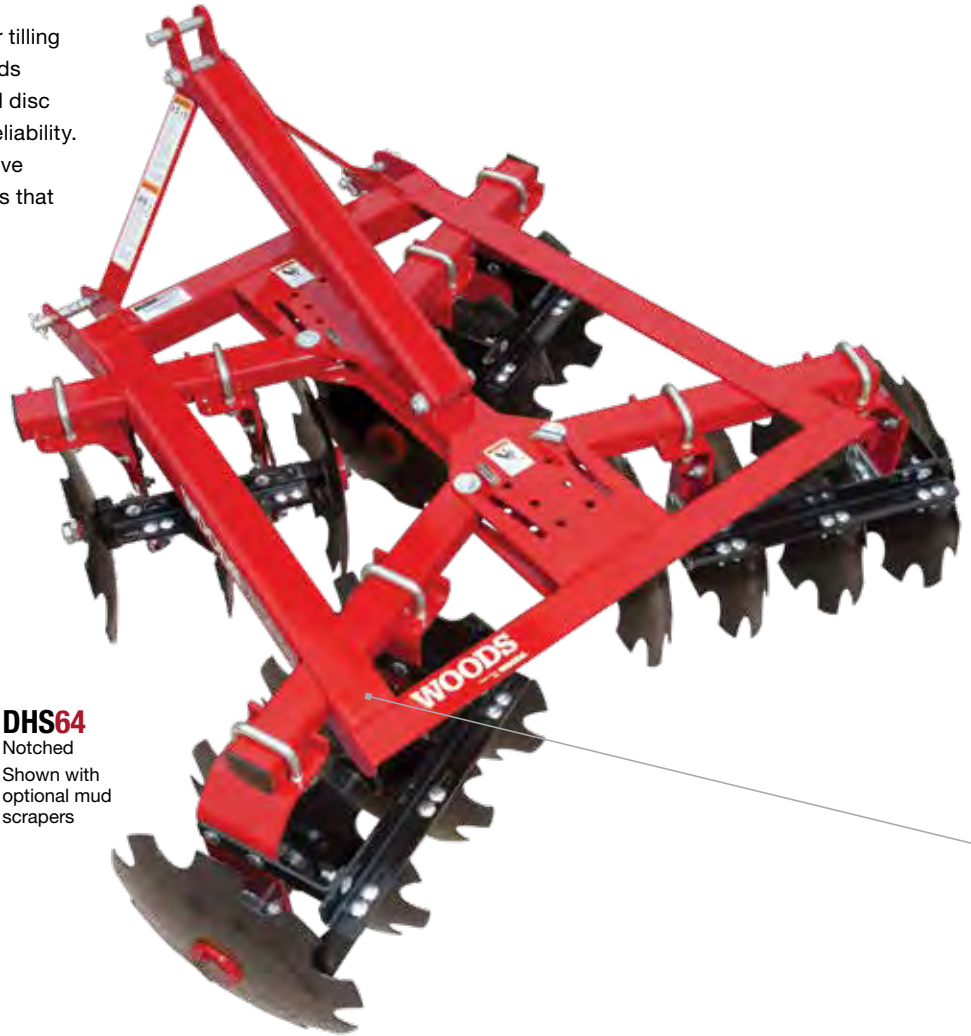

DHS64
Notched
Shown with
optional mud
scrapers

MODEL	DHS48	DHS64	DHS80
Tractor Engine HP	up to 35 hp	25-45 hp	35-55 hp
Tractor Hitch	CAT 1, Lim. CAT 1	CAT 1	
Width	48"	64"	80"
Weight (Depends Upon Blade Type)	390 lbs	508 lbs	590 lbs
Disc Blade Type	notched	notched; or combination smooth and notched	
Average Weight per Blade	33 lbs	36 lbs	33 lbs
Disc Diameter / Quantity	16" / 12	18" / 14	18" / 18
Disc Spacing	7.5" front and rear	9" front, 7.5" rear or 7.5" front and rear	
Gang Axle Diameter	1" square		
Frame Construction	3" x 3" tube and angle		3" x 3" tube and channel
Quick-Hitch Compatible	Yes		

Disc Harrows

TRACTOR PTO HP RANGE: 45 - 85 HP

DHM80 | 80-inch

DHM96 | 96-inch

- Optional furrow fillers to reduce end ridges
- Optional rear drawbar for towing equipment
- Optional mud scrapers that prevent clogging, increase productivity



Tapered frame design balances individual disc gangs for easy adjustments

DHM80
Notched
Shown with optional mud scrapers, furrow fillers and drawbar

MODEL	DHM80	DHM96
Tractor Engine HP	45-75 hp	55-85 hp
Tractor Hitch	CAT 1 & 2	
Width	80"	96"
Weight (Depends Upon Blade Type)	845 lbs	960 lbs
Disc Blade Type	notched; or combination smooth and notched	
Average Weight per Blade	47 lbs	44 lbs
Disc Diameter / Quantity	20" / 18	20" / 22
Disc Spacing	9" front, 7.5" rear or 7.5" front and rear	
Gang Axle Diameter	1 1/8" square	
Frame Construction	3" x 3" tube	
Quick-Hitch Compatible	Yes	