

LANDSCAPE EQUIPMENT



WOODS LANDSCAPE EQUIPMENT

Whether your landscape projects are contained in your own backyard or the way you make your living, you want equipment that's easy to use, easy to maintain and built to last. That's what Woods delivers.

We build a full line of tools to tackle a variety of projects, such as putting in a new garden, reshaping a driveway or seeding a lawn. We'll help you get the most out of the investment you've made in your tractor. And, at the end of the day, we'll help you feel good about all the chores you checked off your list.

Pull it all together and you've got Woods Power — power to be more productive.

A FULL LINE OF TOOLS TO TACKLE A VARIETY OF YARD AND GARDEN PROJECTS.

BOX SCRAPERS are designed with exceptional strength and versatility to move large amounts of material; the tough, reversible cutting edge leaves a level finish.

GRADING SCRAPERS are ideal for leveling dirt and gravel in driveways, lawns and fields.

REAR BLADES move dirt, grade driveways and clear snow.

LANDSCAPE RAKES are strong, yet versatile, for both tough clean-up jobs and fine raking.

POST HOLE DIGGERS power through a variety of soil conditions and projects, like planting trees and shrubs or installing deck or fence posts.

STUMP GRINDERS reduce tree stumps to mulch in minutes and grind below ground level.

CULTIPACKERS are a versatile seedbed tool designed to help improve germination rates and yield. Use our rugged Woods cultipacker to crush dirt clods and eliminate air pockets before planting or to lightly firm the soil around seeds after planting.

Quick Hitch

Woods TQH1 quick hitch makes easy work of changing from one 3-point attachment to another. When hooking up to many implements, you never have to leave the tractor because lower hooks automatically lock implement into place.

- Heavy-duty steel construction with adjustable top link bracket.
- Seven-eighths-inch mounting pins and adapter bushings.
- Lower arms lock automatically.
- Ensure fast, easy and safe hook-ups with ASABE quick-hitch compatibility.



TQH1

MODEL	TQH1	TQH2
Tractor Hitch	CAT 1	CAT 2
Width	27.25"	
Approximate Weight	75 lbs	
Mounting Pin Diameter	.875"	
Adapter Bushing Diameter	1.25"	

Box Scrapers

TRACTOR PTO HP RANGE: UP TO 45 HP

GBC48 | 48-inch **BSS54** | 54-inch
BSS60 | 60-inch **BSS65** | 65-inch
BSS72 | 72-inch

- Three-point hitch: Limited 1, and 1
- Designed for sub-compact and compact tractors
- Hardened scarifier teeth with replaceable tips
- Reversible/replaceable high-carbon cutting edges



BSS72

TRACTOR PTO HP RANGE: 40 - 65 HP

BSM72 | 72-inch
BSM84 | 84-inch

- Three-point hitch: CAT 1 and 2
- End plates: .5-inch– 33% heavier end plates than our BSS models
- One-quarter-inch plate welded inside of end plates to increase life
- Optional floating, hinged tailgate to provide maximum downforce on cutting edge

MODEL	GBC48	BSS54	BSS60	BSS65	BSS72	BSM72	BSM84
Tractor Engine HP Range	up to 25 hp		up to 45 hp			40–65 hp	
Tractor Hitch	Ltd 1 & 1		CAT 1			CAT 1 & 2	
Working Width	48"	54"	60"	65"	72"	72"	84"
Capacity	6.8' cubic	10.3' cubic	11.5' cubic	12.5' cubic	13.8' cubic	13.8' cubic	16.2' cubic
Approximate Weight	285 lbs	486 lbs	514 lbs	528 lbs	551 lbs	680 lbs	750 lbs
Scarifier Depth	0"–1.5"		0", 1.5" or 3" adjustable				
Number of Scarifiers	4	4	5	5	6	6	7
Tailgate Type	fixed					fixed, floating optional	
Reversible Cutting Edge (qty/size)	(2) 0.5" x 6"						

Grading Scrapers



Ideal for leveling, from filling driveway potholes to removing a soil berm. Woods grading scrapers are designed to handle more material in fewer passes.

- Heavy-duty mast plates create more downforce for smoother surface and virtually eliminates washboard effect
- Adjustable skid shoes and scarifiers increase performance
- Tall side frames hold more material
- Approachable leading edges and structural reinforcements keep scraper stronger for longer
- Reversible/replaceable high-carbon cutting edges



GSS72P

GSS72

**TRACTOR PTO HP RANGE:
15 - 45 HP**

- GSS54/GSS54P** | 53-inch
- GSS60/GSS60P** | 59-inch
- GSS72/GSS72P** | 71-inch

- Three-point hitch: Limited CAT 1 and 1
- Fourteen- and sixteen-inch box heights

**TRACTOR PTO HP RANGE:
30 - 65 HP**

- GSM84/GSM84P** | 83-inch
- GSM96/GSM96P** | 95-inch

- Three-point hitch: CAT 1 and 2
- Sixteen-inch box height — one of the tallest in the industry

MODEL	GSS54/ GSS54P	GSS60/ GSS60P	GSS72/ GSS72P	GSM84/ GSM84P	GSM96/ GSM96P
Tractor Engine HP Range	15–30 hp	20–45 hp		30–65 hp	
Hitch Category	Limited CAT 1 & 1	CAT 1		CAT 1 & 2	
Working Width	53"	59"	71"	83"	95"
Overall Width	58"	64"	76"	88"	100"
Overall Length	42"	46"			
Box Height	14"	16"			
Weight without Scarifiers	349 lbs	493 lbs	580 lbs	664 lbs	712 lbs
Weight with Scarifiers*	409 lbs	553 lbs	655 lbs	754 lbs	802 lbs
Number of Scarifiers*	4		5	6	
Reversible Cutting Edge (qty/size)	(2) 0.5" x 6"				
Scarifier Adjustments*	-4.0, -2.5, -1.0, +1.0	-2.5, -1.0, +0.5, +2.5			
Skid Shoe Adjustment	-0.75 to +0.75		-1.0 to +0.5		
Lower Hitch Design	clevis				

* NOTE: Premium Models only: GSS54P, GSS60P, GSS72P, GSS84P, GSS96P

Rear Blades

Ideal for grading dirt or gravel, cleaning up construction sites and moving snow.

TRACTOR HP RANGE: UP TO 45 HP

RBS54 | 53-inch

RBS60P | 59-inch

RBS60 | 59-inch

RBS72P | 71-inch

RBS72 | 71-inch

RBS84P | 83-inch

- Formed moldboard made from high-strength steel provides exceptional rigidity and pivots 360°
- Double-beveled, reversible, bolt-on cutting edge adds to product life and enables easy replacement
- Optional skid shoes for depth control, and optional parking stand for easier attachment

TRACTOR HP RANGE: 30 - 65 HP 50 - SERIES REAR BLADES

RB72.50 | 71-inch

RB84.50 | 83-inch

RB96.50 | 95-inch

- Seventeen-inch high, ¼-inch thick moldboard
- Double-beveled, reversible and hardened cutting edge for long life
- Fully manual offers angle, offset and tilt adjustments
- Optional end plates, skid shoes and hydraulic angle kit (includes relief valve)
- Convenient parking stand is standard



Rear Blades

TRACTOR HP RANGE: 40 - 85 HP 60 - SERIES REAR BLADES

RB84.60 | 83-inch

RB96.60 | 95-inch


- Seventeen and a half-inch high, 5/16-inch thick moldboard
- Double-beveled, reversible and hardened cutting edge for long life
- Choose manual or hydraulic, featuring angle, offset and tilt adjustments
- Optional end plates, skid shoes, tailwheel and selector valve
- Convenient parking stand is standard

TRACTOR HP RANGE: 50 - 100 HP

RB750 | 83-inch

RB850 | 95-inch

- Three-point hitch: CAT 2
- Seventeen-inch high, reinforced moldboard
- Optional end plates, skid shoes and tailwheel
- Standard parking stand

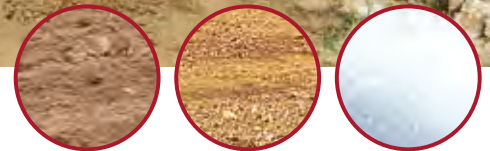

Rear Blades



RBS84P
Shown with optional parking stand

MODEL	RBS54	RBS60	RBS72	RBS60P	RBS72P	RBS84P	RB72.50	RB84.50	RB96.50
Tractor Engine HP	up to 30 hp			20-45 hp			30-65 hp		
Tractor Hitch	Limited CAT 1 & 1			CAT 1			CAT 1 & 2		
Working Width	53"	59"	71"	59"	71"	83"	71"	83"	95"
Moldboard Height	12"			15"			17"		
Moldboard Thickness	0.182" (grade 80 steel)			0.125" (grade 80 steel)			0.25" (grade 80 steel)		
Weight	134 lbs	142 lbs	156 lbs	268 lbs	288 lbs	308 lbs	455 lbs	475 lbs	495 lbs
Double-beveled, Reversible Cutting Edge Dimensions	0.375" x 6"			0.5" x 6"			0.5" x 6"		
Angle Adjustments	5 positions up to 30°						7 positions up to 45° (mech or hyd)		
Offset Adjustments	—	—	—	up to 12" left or right			6", 12", 18" left or right		
Tilt Adjustments	—	—	—	up to 15°			5 positions up to 23°		
End Plates	—	—	—	optional			optional		
Skid Shoes	optional						optional		
Tailwheel	—	—	—	—	—	—	—		
Parking Stand	optional						standard		
ASABE Quick-Hitch Compatible	yes						yes		

Rear Blades



RB96.60
Shown with optional hydraulic adjustment and selector valve


RB84.60	RB96.60	RB750	RB850	RB990	RB1010
40-85 hp		50-100 hp		80-150 hp	
CAT 1 & 2		CAT 2		CAT 2 & 3	
83"	95"	83"	95"	107"	119"
17.5"		17"		18"	
0.313"		0.313"		0.25"	
705 lbs	730 lbs	1,193 lbs	1,233 lbs	1,483 lbs	1,535 lbs
0.5" x 6"		0.5" x 6"			
up to 45° (mech or hyd)		9 forward up to 60°; 5 reverse up to 30° (mech or hyd)		up to 60° (hyd)	
up to 20° (mech or hyd)		up to 24° (mech or hyd)		up to 33° (mech or hyd)	
up to 23° (mech or hyd)		up to 30° (mech or hyd)		up to 28° (mech or hyd)	
optional		optional		—	—
optional		optional		—	—
optional		optional		optional	
standard		standard		standard	
yes		yes			

Landscape Rakes



LRS72P

WOODS LANDSCAPE RAKES ARE BUILT WITH RUGGED DURABILITY FOR TOUGH CLEAN-UP JOBS, AS WELL AS FINE RAKING FEATURES FOR LIGHT-DUTY LAWN CARE AND GENERAL MAINTENANCE.

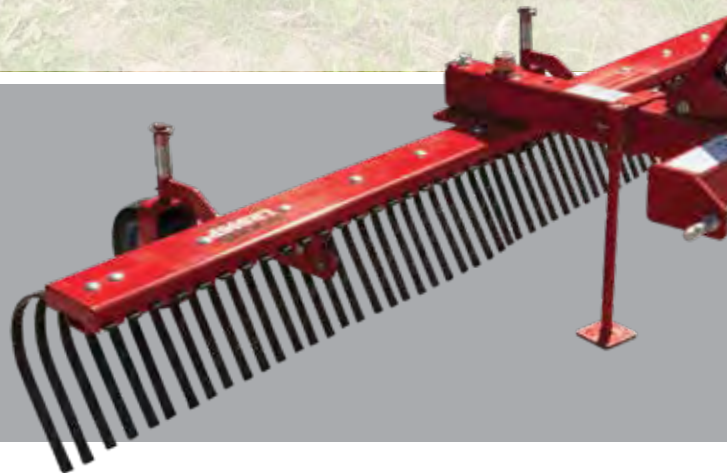

IDEAL FOR LAWN MAINTENANCE PROJECTS AND CLEARING DEBRIS AT CONSTRUCTION SITES.

TRACTOR PTO HP RANGE: UP TO 30 HP

LRS52 | 52-inch **LRS60** | 60-inch **LRS72** | 72-inch

TRACTOR PTO HP RANGE: 20 - 45 HP

LRS72P | 72-inch **LRS84P** | 84-inch **LRS96P** | 96-inch

- Heavy pivot components increase product longevity
- Large, structural tine beam channel holds alloy spring steel tines firmly
- Fast, easy and safe hook-ups with ASABE quick-hitch compatibility
- Optional gauge wheels allow better depth control and optional parking stand for easier attachment


MODEL	LRS52	LRS60	LRS72	LRS72P	LRS84P	LRS96P
Tractor Engine HP Range	up to 30 hp			20-45 hp		
Tractor Hitch	Limited CAT 1 & 1			CAT 1		
Working Width	52"	60"	72"	72"	84"	96"
Approximate Weight	156 lbs	168 lbs	186 lbs	264 lbs	288 lbs	311 lbs
Pivot Angle	Forward - 5 @ 15°, Reverse - 5 @ 15°					
Tines Dimensions	5/16" x 1"					
Tines Spacing	1"					
Gauge Wheels	optional					
ASABE Quick-Hitch Compatible	yes					
Parking Stand	optional					

* NOTE: LRS72P, LRS84P and LRS96P are Premium Models



Shown with optional parking stand.

3-point Log Splitter

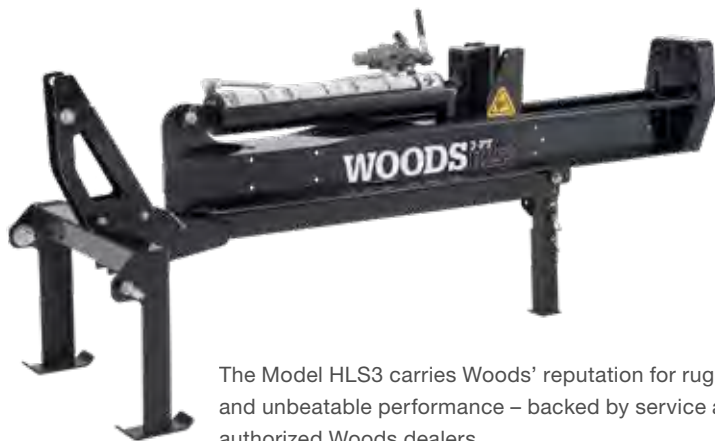

The Model HLS3 carries Woods' reputation for rugged durability and unbeatable performance – backed by service and support from authorized Woods dealers.

- Attaches inline to tractor, providing a large operator work area
- Beam is reinforced in high-stress areas and integrated with the footplate for added strength and durability
- Precision-engineered 8" wedge cleanly splits even the most difficult wood, such as wet, stringy elm
- Operates in horizontal or vertical position

TRACTOR HITCH CATEGORY: CAT 1 & 2 HLS3

MODEL	HLS3
Hitch Type	3-point
Hitch Category	CAT 1 & CAT 2
Beam	manufactured in the USA from high-strength US steel; 6" x 6"
Cylinder	4" diameter x 24" stroke
Valve	auto-return
Operation	horizontal and vertical
Maximum Splitting Force*	20 tons
Log Capacity	24.5" length (61 cm)
Approximate Cycle Time*	13 seconds
Wedge	8" high
Working Height	25" (63.5 cm)
Length	82.5"
Width	48.2"
Total Weight	400 lbs
Log Cradle	patented design is integrated with foot plate

* Tonnage and cycle times may vary depending upon mechanical and environmental conditions.

Post Hole Diggers

TRACTOR PTO HP RANGE: 14 - 95 HP

TPD25 TPD35 TPD95

Ideal for landscapers, farmers and municipalities planting trees and shrubs or installing decks and fencing in all soil types and conditions.

- Heavy-duty welded construction and shear pin increase product longevity
- Rugged gearbox with tapered roller bearing withstands shock and load, handles the toughest projects
- Six-year gearbox warranty



MODEL	TPD25	TPD35	TPD95
Tractor PTO HP Range	14-25 hp	20-35 hp	35-95 hp
Tractor Hitch	CAT 0, Ltd 1, & 1	CAT 1	CAT 1 & 2
Approximate Weight (without auger)	140 lbs	146 lbs	238 lbs
Drive Type	gearbox		
Tractor PTO Speed	540 rpm		
Shear Pin	standard		
Positioning Handle	standard		
Hydraulic Downforce Kit	optional		
Parking Stand	optional		
Auger (diameter x length)	6", 9", 12" x 36"	6", 9", 12", 18" x 48"	6", 9", 12", 18", 24", 30" x 48"
Auger Extension	optional (12")		

Cultipackers

TRACTOR PTO HP RANGE: UP TO 75 HP

C48T | 48-inch **C72** | 72-inch

C84 | 84-inch

- Attaches to ATVs, UTVs and tractors up to 75 hp

A rugged, easy-to-use seedbed tool that crushes dirt clods and firms the soil around seeds.

- Notched, cast-iron cultipacker wheels provide perfect seed-to-soil contact for higher germination rates
- Flip-over hitch easily changes from towing to working the dirt
- Greasable, triple-sealed bearings are easy to maintain and extend work life



MODEL	C48T	C72	C84
Tractor PTO HP Range	up to 30 hp	20-75 hp	20-75 hp
Hitch Type / Category	pull-type / 2" ball	3-pt / CAT 1 & 2	
Working Width	48"	72"	84"
Overall Width	67"	82"	94"
Weight	275 lbs	371 lbs	420 lbs
Axle Size	1.75"		
Cultipacker Wheel Diameter	9.5"		
Cultipacker Wheel Quantity	21	32	37