


3-point Log Splitter

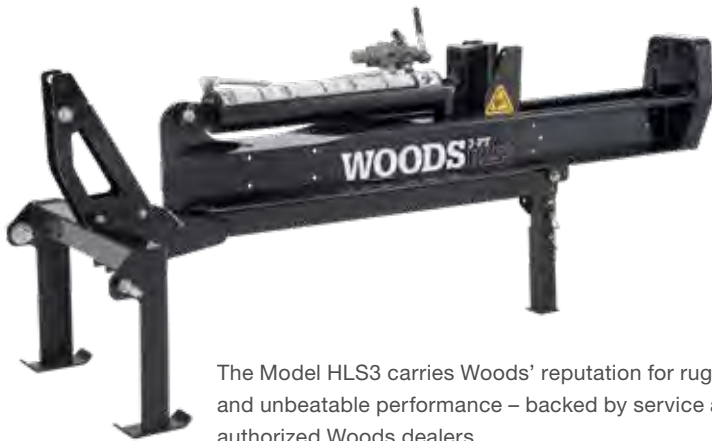

The Model HLS3 carries Woods' reputation for rugged durability and unbeatable performance – backed by service and support from authorized Woods dealers.

- Attaches inline to tractor, providing a large operator work area
- Beam is reinforced in high-stress areas and integrated with the footplate for added strength and durability
- Precision-engineered 8" wedge cleanly splits even the most difficult wood, such as wet, stringy elm
- Operates in horizontal or vertical position

TRACTOR HITCH CATEGORY: CAT 1 & 2 HLS3

MODEL	HLS3
Hitch Type	3-point
Hitch Category	CAT 1 & CAT 2
Beam	manufactured in the USA from high-strength US steel; 6" x 6"
Cylinder	4" diameter x 24" stroke
Valve	auto-return
Operation	horizontal and vertical
Maximum Splitting Force*	20 tons
Log Capacity	24.5" length (61 cm)
Approximate Cycle Time*	13 seconds
Wedge	8" high
Working Height	25" (63.5 cm)
Length	82.5"
Width	48.2"
Total Weight	400 lbs
Log Cradle	patented design is integrated with foot plate

* Tonnage and cycle times may vary depending upon mechanical and environmental conditions.

Post Hole Diggers

TRACTOR PTO HP RANGE: 14 - 95 HP

TPD25 TPD35 TPD95

TPD35



Ideal for landscapers, farmers and municipalities planting trees and shrubs or installing decks and fencing in all soil types and conditions.

- Heavy-duty welded construction and shear pin increase product longevity
- Rugged gearbox with tapered roller bearing withstands shock and load, handles the toughest projects
- Six-year gearbox warranty

MODEL	TPD25	TPD35	TPD95
Tractor PTO HP Range	14-25 hp	20-35 hp	35-95 hp
Tractor Hitch	CAT 0, Ltd 1, & 1	CAT 1	CAT 1 & 2
Approximate Weight (without auger)	140 lbs	146 lbs	238 lbs
Drive Type	gearbox		
Tractor PTO Speed	540 rpm		
Shear Pin	standard		
Positioning Handle	standard		
Hydraulic Downforce Kit	optional		
Parking Stand	optional		
Auger (diameter x length)	6", 9", 12" x 36"	6", 9", 12", 18" x 48"	6", 9", 12", 18", 24", 30" x 48"
Auger Extension	optional (12")		