

Front Mount Snowblower



Standard features include hydraulic lift and chute rotation, bolt-on cutting edge, and adjustable skid shoes



Erskine® snowblowers have been quality proven since 1948. Snow removal companies rely on our blowers to be trouble free and ready to go!



True quick attach systems that allow easy on/off attachment in approximately 5 minutes



Quickly chews through deep drifts and clears to the bare ground, widths vary from 60" to 108"



Take a Picture of This QR Code With Your Smart Phone to See it in Action

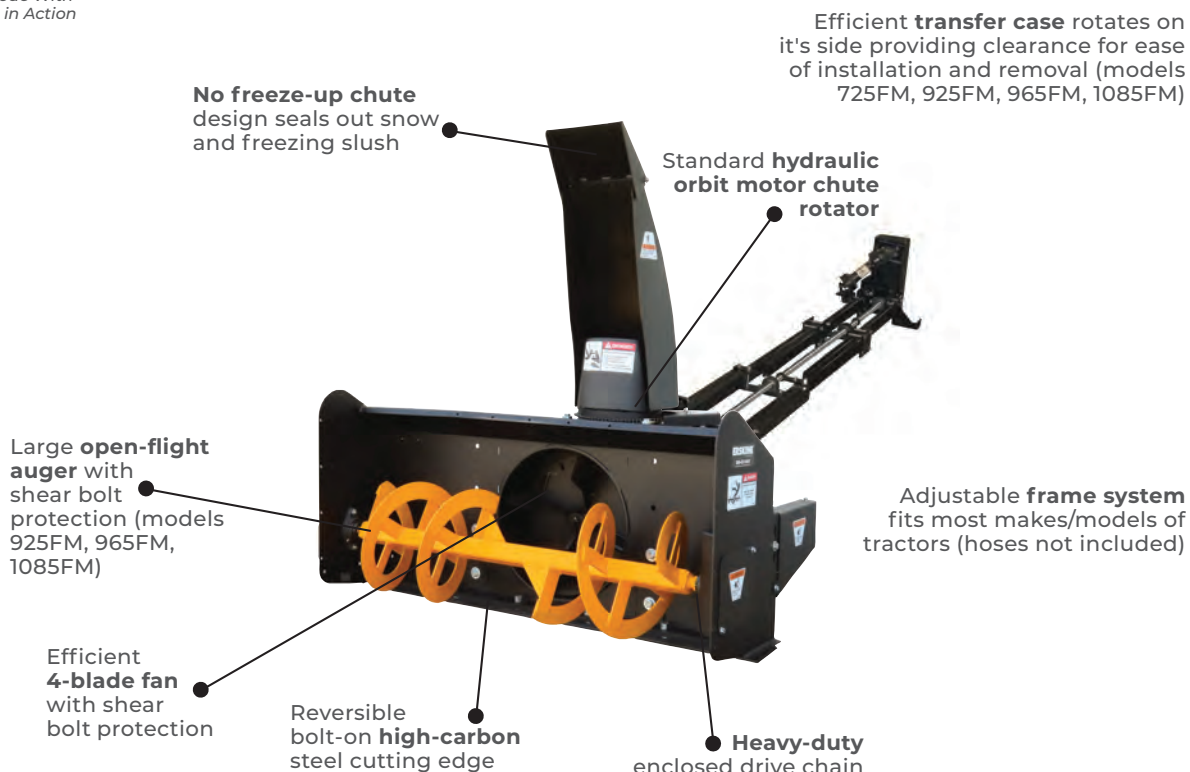

FEATURES & BENEFITS

- Quick mount/dismount
- Hydraulic lift and chute rotation
- Adjustable skid shoes
- Shaft drive for maximum efficiency

SPECIFICATIONS / OPTIONS

Model	620FM	725FM	925FM	965FM	1085FM
Part Number	920117	920119	920122	902123	902124
Stage	2	2	2	2	2
Width of Cut	60"	78" (w/wings)	90"	96"	108"
Cutting Height	29"	36"	36"	36"	36"
Auger Diameter	16" Open Flight	16" Open Flight	18" Open Flight	16" Dual	16" Dual
Fan Diameter	20" 4-Blade	24" 4-Blade	26" 4-Blade	30" 4-Blade	30" 4-Blade
Discharge Chute	270° Hydraulic Rotator*	270° Hydraulic Rotator*	270° Hydraulic Rotator***	270° Hydraulic Rotator***	270° Hydraulic Rotator***
PTO Speed	540 RPM	540 RPM	540 RPM	540 RPM or 1,000 RPM	540 RPM or 1,000 RPM
Casting Distance	Up to 30'	Up to 35'	Up to 40'	Up to 45'	Up to 45'
PTO Range	20 - 35 HP	35 - 65 HP	50 - 100 HP	90 - 175 HP	90 - 175 HP
Driveline Series	12	35	35	55	55
Cutting Edge	5/8" x 6" Reversible	5/8" x 6" Reversible	5/8" x 6" Reversible	5/8" x 6" Reversible	5/8" x 6" Reversible
Skid Shoes	Adjustable / Replaceable	Adjustable / Replaceable	Adjustable / Replaceable	Adjustable / Replaceable	Adjustable / Replaceable
Shipping Weight	1,200 lb.	1,450 lb.	2,150 lb.	3,000 lb.	3,100 lb.
Options					
Hydraulic Deflector					
Electric Deflector					
Hardened Skid Shoes	Standard	Standard	Standard	Standard	Standard
Urethane Skid Shoes			N/A	N/A	N/A
Urethane or Rubber Cutting Edge			N/A	N/A	N/A
Wing Kit	Optional	N/A	N/A	N/A	N/A
Truck Loading Chute	N/A				
Electric Deflector for TLC	N/A				

*Includes deflector & 3-position linkage. Hydraulic and electric are optional. **Truck loading chute with deflector control is optional